



8 7 6 5 4 3 2 1

A

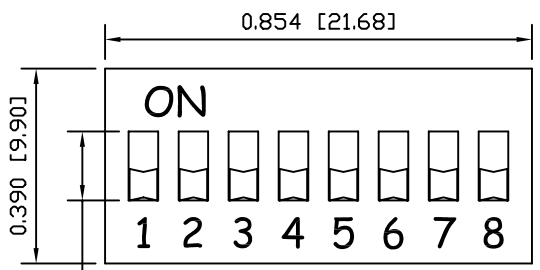

SCHMATIC



SPECIFICATIONS

FUNCTION:
8x1P1T OFF-ON

RATINGS:
Switching: 25mA 24VDC
Steady: 100mA 50VDC

ELECTRICAL LIFE:
2,000 Operations Per Switch

CONTACT RESISTANCE:
Max. 50mΩ Initial

INSULATION RESISTANCE:
100MΩ at 500VDC

WITHSTAND VOLTAGE:
500VAC For 1 Minute

CAPACITANCE:
5pF Max.



SHOCK RESISTANCE:
Mil-Std. 202F, Method 213B
Gravity: 50G, 11msec.
Direction: 6 sides
Times: 3 Each Direction
High Reliability

VIBRATION RESISTANCE:
Mil-Std. 202F, Method 201A
Frequency: 10-55-10Hz/1 Minute
Direction: X, Y, Z
Time: 2 Hours Each Direction
High Reliability

OPERATING FORCE:
1000gf


TEMPERATURE:
Operating: -20°C to 70°C
Storage: -40°C to 85°C

B

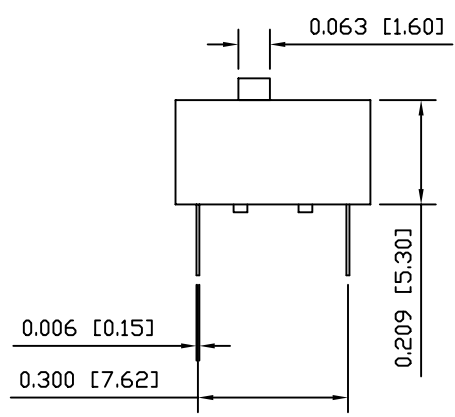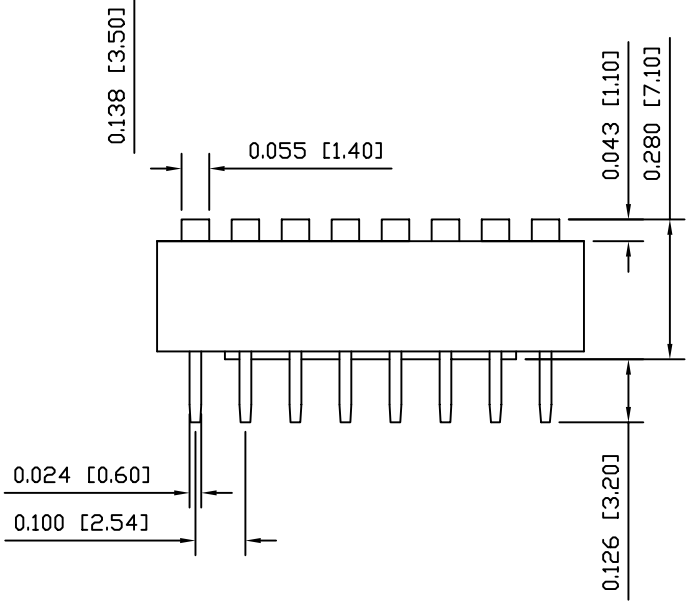

C

SUGGESTED PCB LAYOUT

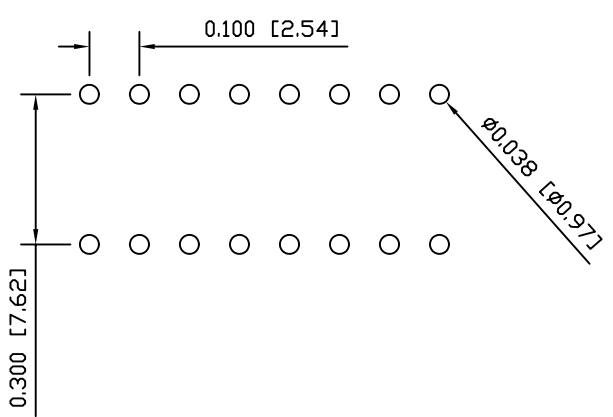

MATERIALS

BASE:
Polybutylene Terephthalate (PBT), UL94V-0

COVER:
Polybutylene Terephthalate (PBT), UL94V-0

ACTUATOR:
Polybutylene Terephthalate (PBT), UL94V-0

TERMINALS:
Gold Over Nickel Plated Phosphor Bronze

POTTING:
Epoxy

COLORS

BODY:
Red

ACTUATOR:
White

MARKING COLOR:
White

D

LAMB INDUSTRIES P.O. Box 25110 Portland, OR 97298
LAST REVISION: Apr. 01, 2004

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [MILLIMETERS]
TOLERANCES ARE:
DEC .X±0.2 ANG ± 1°
.XXX±0.008 DRAWING NOT TO SCALE

DRAWING NUMBER: 06-LDS-08-R-B.dwg

LDS-08-R-B

8 7 6 5 4 3 2 1