

SPECIFICATIONS

FUNCTION:
1P2T ON-ON

RATINGS:
UL RATING:
20A 125VAC
16A 250VAC
3/4HP 250VAC

EUROPEAN RATING:
16(4)A 1E4 250VAC
10(2)A 5E4 250VAC

CONTACT RESISTANCE:
Max. 20mΩ

INSULATION RESISTANCE:
100MΩ at 500VDC Min.

WITHSTAND VOLTAGE:
1000VAC For 1 Minute

ELECTRICAL LIFE:
10,000 Cycles

TEMPERATURE:
-20°C to 85°C

APPROVALS:



MATERIALS

BODY:
Nylon 66, UL94 V-2

ROCKER:
Nylon 66, UL94 V-2

CONTACTS:
Silver-Cadmium Alloy

ELECTRICAL TERMINALS:
Silver Plated Copper

COLORS AND MARKINGS


BODY:
Black

ROCKER:
Black

MARKINGS:
None

MARKING COLOR:
None

SUGGESTED PANEL CUTOUT

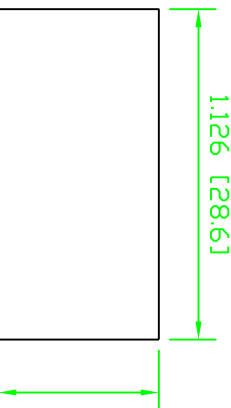

SCHEMATIC



UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES (MILLIMETERS)

TOLERANCES ARE:
DEC .X±0.2 ANG ±1°
.XXX±0.008 DRAWING NOT TO SCALE

AMBI P.O. Box 2310
INDUSTRIES Portland, OR 97208
LAST REVISION:
MAY. 23, 2005

DRAWING NUMBER: 14-RSC143D1100.dwg

RSC143D1100