

SPECIFICATIONS

FUNCTION:
1P2T ON-ON

RATINGS:
0.4VA Max at 20V AC or DC

CONTACT RESISTANCE:
10mΩ Max. Initial

INSULATION RESISTANCE:
1,000MΩ Min.

DIELECTRIC STRENGTH:
1,500VAC



ELECTRICAL LIFE:
30,000 Cycles

OPERATING TEMPERATURE:
-30°C to 85°C

APPROVALS:



SCHEMATIC

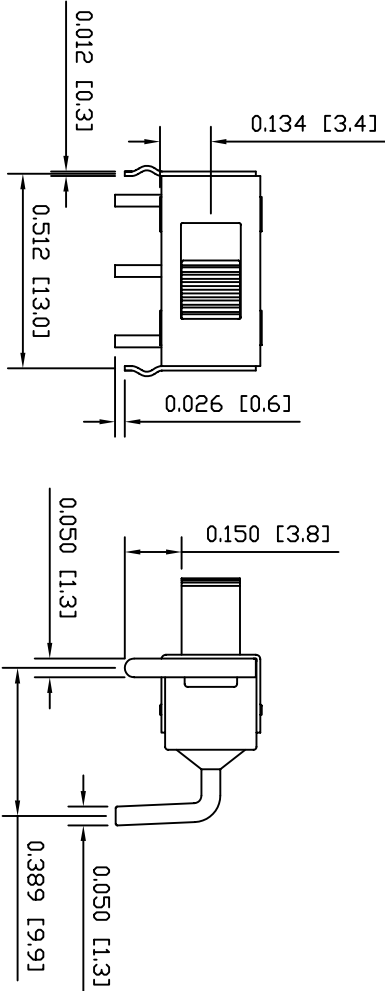

MATERIALS

BODY:
Diallyl Phthalate (DAP), UL94 V-0

BODY COVER:
Stainless Steel

ACTUATOR:
Nylon


COLORS

BODY:
Red

BODY COVER:
Metallic

ACTUATOR:
Black

SUGGESTED PCB LAYOUT

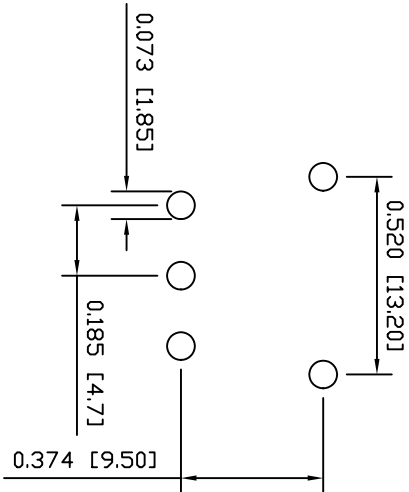

CONTACTS:
Gold over Nickel Plated Copper

ELECTRICAL TERMINALS:
Gold over Nickel Plated Copper

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [MILLIMETERS]	
TOLERANCES ARE:	ANG ± 1°
DEC .X4-0.2	DRAWING NOT TO SCALE
.XX42-0.008	

LAMB INDUSTRIES
P.O. Box 28110
Portland, OR 97298

LAST REVISION:
JAN. 25, 2006

DRAWING NUMBER: 17-1101-M2S3ABE2.dwg

1101-M2S3ABE2