

**SPECIFICATIONS**

FUNCTION:  
1P2T ON-ON

RATINGS:  
0.4VA Max. at 20V AC or DC Max.

WATERPROOFING:  
IP67

CONTACT RESISTANCE:  
20mΩ Max. at 2-4VDC

INSULATION RESISTANCE:  
1,000MΩ Min.

DIELECTRIC STRENGTH:  
1,500VAC at Sea Level

ELECTRICAL LIFE:  
30,000 Cycles at Full Load

OPERATING TEMPERATURE:  
-30°C to 85°C

APPROVALS:



**SUGGESTED PCB LAYOUT**

**COLORS**

BODY:  
White

ACTUATOR:  
Black

**MATERIALS**


BODY:  
Glass Filled Nylon 4/6, UL 94V-0

ACTUATOR:  
Chrome Plated Brass

SUPPORT:  
Tin Plated Brass

CONTACTS:  
Gold Over Nickel Plated Copper Alloy

TERMINALS:  
Gold Over Nickel Plated Copper Alloy

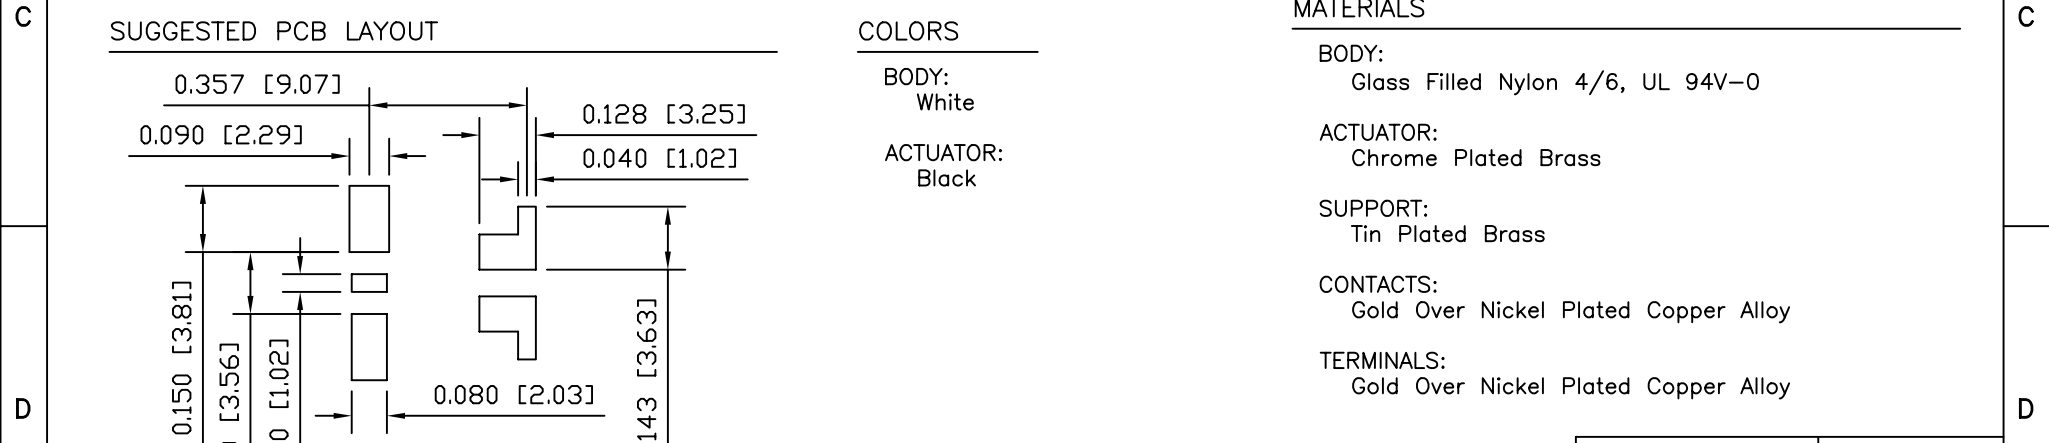

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [MILLIMETERS]		DRAWING NUMBER: 17-LTS01-MD1SABE.dwg	LAST REVISION: OCT. 24, 2002
TOLERANCES ARE:			
DEC .X±0.2	ANG ± 1°	LTS01-MD1SABE	
.XXX±0.008	DRAWING NOT TO SCALE		