

8

7

6

5


4

3


2

1

A



SCHEMATIC

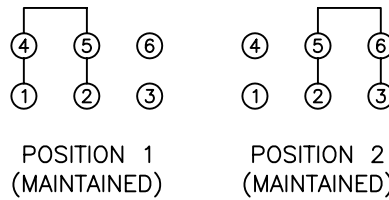

SCHEMATIC

FUNCTION:  
1P2T ON-ON

RATING:  
0.2A 30VDC

OPERATION FORCE:  
200±150gf

CONTACT RESISTANCE:  
Initial: 70mΩ Max.

ELECTRICAL LIFE:  
10,000 Cycles Min.



APPROVALS:



B

A

POSITION 1    POSITION 2

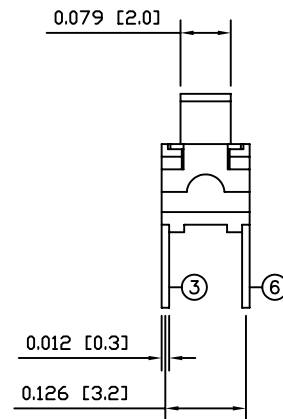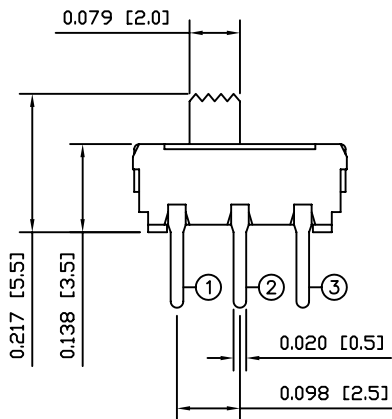

B

C

C

MATERIALS

BODY:  
Polyamide 6/6 (PA66)


ACTUATOR:  
Polyamide 6/6 (PA66)

COVER:  
Stainless Steel

MOBILE CONTACT:  
Silver Plated Brass

TERMINALS:  
Silver Plated Brass

SUGGESTED PCB LAYOUT



COLORS

BODY:  
Black

ACTUATOR:  
Black

D

D

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [MILLIMETERS]	
TOLERANCES ARE:	
DEC .X±0.2	ANG ± 1°
.XXX±0.008	DRAWING NOT TO SCALE
DRAWN BY: CARL BUCHHEIT	

	P.O. Box 25110 Portland, OR 97298	LAST REVISION: AUG. 24, 2006
	DRAWING NUMBER: 48-LHSS1104.dwg	

LHSS1104

8

7

6

5

4

3

2

1